

Bulldog Castors



Specialists in Industrial,
Commercial & Domestic **Castors**

CASTORS AND WHEELS



Load Capacity

To ensure the castors operate effectively it is important to calculate the total potential weight on each castor wheel. The Weight Distribution and the effect of Shock, Impact and Uneven floors should be taken into account.



Flooring Type

The flooring surface that a castor will operate on is an important factor when choosing a castor material. Rubber castors are ideal for rough surfaces and on delicate floors, whilst hard castors are best on smooth surfaces such as concrete & soft floors such as carpet



Fixing Method

Choosing how you will mount the castors to the equipment is important when selecting the bracket fitting type. The most popular fittings are the Single Bolt Hole fitting and also the Top Plate fitting. Other Fixings are available on request.



Motion & Stability

When selecting a castor you must consider the movement and mobility required. The positioning of the castors on the equipment will have a great effect on the mobility & stability, as will the bracket type, i.e. Swivel or Fixed

NO MINIMUM ORDER



ORDER ONLINE



FAST DELIVERY



FURNITURE AND LIGHT DUTY



LIGHTWEIGHT, RETAIL & DISPLAY



INDUSTRIAL & EXTRA HEAVY DUTY



WHEELS

Furniture & Light Duty Castors

The Bulldog™ range of Light Duty & Furniture Castors offer an extra level of function to beds, sofa's and cabinets. Available from 28mm to 50mm diameter, these small and light weight castors are discreet, effective and economical.

⇒ **Ideal for Furniture & Appliances**

⇒ **Zinc Plated Metal for Corrosion Resistance**

⇒ **Suitable for loads up to 30kg per Wheel**

⇒ **Lightweight & Economical**



Part Number	Wheel Diameter	Load Rating	Castor Weight	Plate/Bolt Size	Hole Centres	Overall Height
Plate Fitting						
LW-PP50-STP	50mm	30kg	0.116kg	42x40	30x28	72mm
Bolt Fitting						
LW-PP50-SS M10	50mm	30kg	0.140kg	M10x16	-	72mm



Plate Fitting						
LW-PVC50-STP	50mm	30kg	0.133kg	42x40	30x28	72mm
Bolt Fitting						
LW-PVC50-SS M10	50mm	30kg	0.120kg	M10x16	-	72mm



Plate Fitting						
LW-PA50-STP	50mm	30kg	0.116kg	42x40	30x28	72mm
Bolt Fitting						
LW-PA50-SS M10	50mm	30kg	0.109kg	M10x16	-	72mm



Part Number	Wheel Diameter	Load Rating	Castor Weight	Plate Size	Hole Centres	Overall Height
LW-PP28-STP	28mm	15kg	0.042kg	38x32	30x24	39mm
LW-PP32-STP	32mm	20kg	0.046kg	38x32	30x24	43mm
LW-PP38-STP	38mm	25kg	0.048kg	38x32	30x24	49mm



LW-PP28-FTP-2	28mm	15kg	0.035kg	47x20	35	39mm
LW-PP32-FTP-2	32mm	20kg	0.040kg	51x20	39	43mm
LW-PP38-FTP-2	38mm	25kg	0.049kg	56x20	44	49mm

Light Weight, Retail & Display Castors

Our retail and display castors are trusted by some of Europe's largest retailers due to their reliability and great value. This range offers a wide variety of fitting options and wheel materials to suit ever evolving retail environments.

⇒ **TPR Rubber - Ideal for Retail Equipment**

⇒ **Zinc Plate Metal for Corrosion Resistance**

⇒ **Suitable for Loads up to 90Kg per Wheel**

⇒ **Large Diameter for Improved Mobility**



Part Number	Wheel Diameter	Load Rating	Castor Weight	Plate Size	Hole Centres	Overall Height
RT-TRP100-STP	100mm	80kg	0.640kg	78x68	56x46	136mm
RT-TPR125-STP	125mm	90kg	0.739kg	78x68	56x46	160mm



RT-TPR100-STP-B	100mm	80kg	0.713kg	78x68	56x46	136mm
RT-TPR125-STP-B	125mm	90kg	0.843kg	78x68	56x46	160mm



Part Number	Wheel Diameter	Load Rating	Castor Weight	Hole Size		Overall Height
RT-TPR100-BH	100mm	80kg	0.515kg	12mm		133mm
RT-TPR125-BH	125mm	90kg	0.634kg	12mm		157mm



RT-TPR100-BH-B	100mm	80kg	0.601kg	12mm		133mm
RT-TPR125-BH-B	125mm	90kg	0.724kg	12mm		157mm



Additional Options for special order:

- **Thread Guard Wheel Protector.**
- **Ball Bearing Wheel for Smoother Operation.**


Grey PVC Castors



- ⇒ Excellent Wear Resistance
- ⇒ Low Noise & Non Marking Floor Protection
- ⇒ Strong, Durable & Shock Resistant



Part Number	Fixing Type	Wheel Diameter	Overall Height	Top Plate Size	Hole Centres	Load Rating
GPVC50-STP	Top Plate	50mm	74mm	50x50	38x38	35kg
GPVC75-STP	Top Plate	75mm	103mm	65x65	47x47	50kg
GPVC50-STP-B	Top Plate Braked	50mm	74mm	50x50	38x38	35kg
GPVC75-STP-B	Top Plate Braked	75mm	103mm	65x65	47x47	50kg
GPVC50-FTP	Fixed	50mm	69mm	66x29	50mm	35kg
GPVC75-FTP	Fixed	75mm	97mm	85x37	63mm	50kg
GPVC50-BH	Single Bolt	50mm	69mm	-	-	35kg
GPVC75-BH	Single Bolt	75mm	97mm	-	-	50kg
GPVC50-BH-B	Single Bolt Braked	50mm	69mm	-	-	35kg
GPVC75-BH-B	Single Bolt Braked	75mm	97mm	-	-	50kg

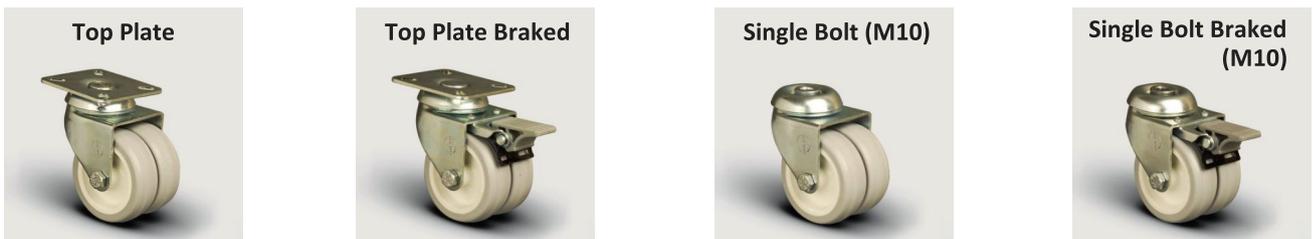

Part Number	Fixing Type	Wheel Diameter	Overall Height	Top Plate Size	Hole Centres	Load Rating
TW-GPVC50-STP	Top Plate	50mm	77mm	65x65	47x47	55kg
TW-GPVC75-STP	Top Plate	75mm	101mm	78x68	56x46	80kg
TW-GPVC50-STP-B	Top Plate Braked	50mm	77mm	65x65	47x47	55kg
TW-GPVC75-STP-B	Top Plate Braked	75mm	101mm	78x68	56x46	80kg
TW-GPVC50-BH	Single Bolt	50mm	69mm	-	-	55kg
TW-GPVC75-BH	Single Bolt	75mm	98mm	-	-	80kg
TW-GPVC50-BH-B	Single Bolt Braked	50mm	69mm	-	-	55kg
TW-GPVC75-BH-B	Single Bolt Braked	75mm	98mm	-	-	80kg

Plastic Castors

- ⇒ Wear, Shock & Impact Resistant
- ⇒ Easy to manoeuvre on Hard Floors
- ⇒ Resistant to many Chemicals & Fluids



Part Number	Fixing Type	Wheel Diameter	Overall Height	Top Plate Size	Hole Centres	Load Rating
BPP50-STP	Top Plate	50mm	74mm	50x50	38x38	35kg
BPP75-STP	Top Plate	75mm	103mm	65x65	47x47	50kg
BPP50-STP-B	Top Plate Braked	50mm	74mm	50X50	38x38	35kg
BPP75-STP-B	Top Plate Braked	75mm	103mm	65x65	47X47	50kg
BPP50-FTP	Fixed	50mm	69mm	66x29	50mm	35kg
BPP75-FTP	Fixed	75mm	97mm	85x37	63mm	50kg
BPP50-BH	Single Bolt	50mm	69mm	-	-	35kg
BPP75-BH	Single Bolt	75mm	97mm	-	-	50kg
BPP50-BH-B	Single Bolt Braked	50mm	69mm	-	-	35kg
BPP75-BH-B	Single Bolt Braked	75mm	97mm	-	-	50kg




Part Number	Fixing Type	Wheel Diameter	Overall Height	Top Plate Size	Hole Centres	Load Rating
TW-BPP50-STP	Top Plate	50mm	77mm	65x65	47x47	55kg
TW-BPP75-STP	Top Plate	75mm	101mm	78x68	56x46	80kg
TW-BPP50-STP-B	Top Plate Braked	50mm	77mm	65x65	47x47	55kg
TW-BPP75-STP-B	Top Plate Braked	75mm	101mm	78x68	56x46	80kg
TW-BPP50-BH	Single Bolt	50mm	69mm	-	-	55kg
TW-BPP75-BH	Single Bolt	75mm	98mm	-	-	80kg
TW-BPP50-BH-B	Single Bolt Braked	50mm	69mm	-	-	55kg
TW-BPP75-BH-B	Single Bolt Braked	75mm	98mm	-	-	80kg

Polyamide Castors

- ⇒ Wear, Shock & Impact Resistant
- ⇒ Easy to manoeuvre on Hard Floors
- ⇒ High Strength & High Load Capacity



Part Number	Fixing Type	Wheel Diameter	Overall Height	Top Plate Size	Hole Centres	Load Rating
WPA50-STP	Top Plate	50mm	74mm	50x50	38x38	40kg
WPA75-STP	Top Plate	75mm	103mm	65x65	47x47	55kg
WPA50-STP-B	Top Plate Braked	50mm	74mm	50X50	38x38	40kg
WPA75-STP-B	Top Plate Braked	75mm	103mm	65x65	47X47	55kg
WPA50-FTP	Fixed	50mm	69mm	66x29	50mm	40kg
WPA75-FTP	Fixed	75mm	97mm	85x37	63mm	55kg
WPA50-BH	Single Bolt	50mm	69mm	-	-	40kg
WPA75-BH	Single Bolt	75mm	97mm	-	-	55kg
WPA50-BH-B	Single Bolt Braked	50mm	69mm	-	-	40kg
WPA75-BH-B	Single Bolt Braked	75mm	97mm	-	-	55kg

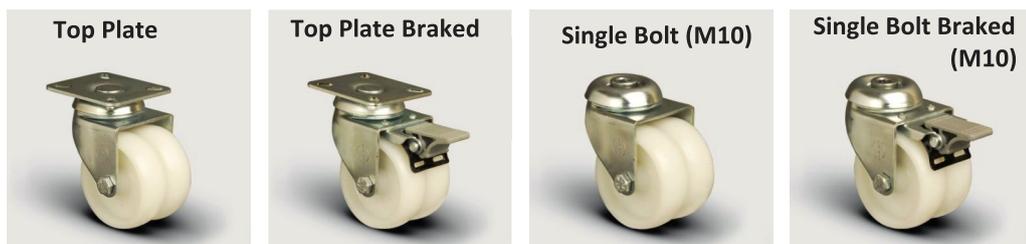


Part Number	Fixing Type	Wheel Diameter	Overall Height	Top Plate Size	Hole Centres	Load Rating
TW-WPA50-STP	Top Plate	50mm	77mm	65x65	47x47	60kg
TW-WPA75-STP	Top Plate	75mm	101mm	78x68	56x46	100kg
TW-WPA50-STP-B	Top Plate Braked	50mm	77mm	65x65	47x47	60kg
TW-WPA75-STP-B	Top Plate Braked	75mm	101mm	78x68	56x46	100kg
TW-WPA50-BH	Single Bolt	50mm	69mm	-	-	60kg
TW-WPA75-BH	Single Bolt	75mm	98mm	-	-	100kg
TW-WPA50-BH-B	Single Bolt Braked	50mm	69mm	-	-	60kg
TW-WPA75-BH-B	Single Bolt Braked	75mm	98mm	-	-	100kg

TPR Rubber Castors

- ⇒ Low Noise & Non Marking Floor Protection
- ⇒ Strong, Durable & Flexible
- ⇒ Ideal for Uneven Floors & Rough Ground



Part Number	Fixing Type	Wheel Diameter	Overall Height	Top Plate Size	Hole Centres	Load Rating
TPR50-STP	Top Plate	50mm	74mm	50x50	38x38	35kg
TPR75-STP	Top Plate	75mm	103mm	65x65	47x47	50kg
TPR50-STP-B	Top Plate Braked	50mm	74mm	50X50	38x38	35kg
TPR75-STP-B	Top Plate Braked	75mm	103mm	65x65	47X47	50kg
TPR50-BH	Single Bolt	50mm	69mm	-	-	35kg
TPR75-BH	Single Bolt	75mm	97mm	-	-	50kg
TPR50-BH-B	Single Bolt Braked	50mm	69mm	-	-	35kg
TPR75-BH-B	Single Bolt Braked	75mm	97mm	-	-	50kg

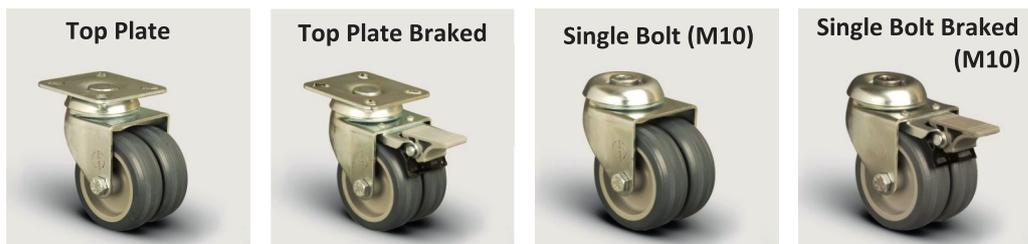

Part Number	Fixing Type	Wheel Diameter	Overall Height	Top Plate Size	Hole Centres	Load Rating
TW-TPR50-STP	Top Plate	50mm	77mm	65x65	47x47	55kg
TW-TPR75-STP	Top Plate	75mm	101mm	78x68	56x46	80kg
TW-TPR50-STP-B	Top Plate Braked	50mm	77mm	65x65	47x47	55kg
TW-TPR75-STP-B	Top Plate Braked	75mm	101mm	78x68	56x46	80kg
TW-TPR50-BH	Single Bolt	50mm	69mm	-	-	55kg
TW-TPR75-BH	Single Bolt	75mm	98mm	-	-	80kg
TW-TPR50-BH-B	Single Bolt Braked	50mm	69mm	-	-	55kg
TW-TPR75-BH-B	Single Bolt Braked	75mm	98mm	-	-	80kg

Polyurethane Castors



Bulldog Castors

- ⇒ Low Noise & Non Marking Floor Protection
- ⇒ Strong, Durable, Flexible & Wear Resistant
- ⇒ Ideal for Uneven Floors & Rough Ground



Part Number	Fixing Type	Wheel Diameter	Overall Height	Top Plate Size	Hole Centres	Load Rating
CPU50-STP	Top Plate	50mm	74mm	50x50	38x38	40kg
CPU75-STP	Top Plate	75mm	103mm	65x65	47x47	55kg
CPU50-STP-B	Top Plate Braked	50mm	74mm	50X50	38x38	40kg
CPU75-STP-B	Top Plate Braked	75mm	103mm	65x65	47X47	55kg
CPU50-BH	Single Bolt	50mm	69mm	-	-	40kg
CPU75-BH	Single Bolt	75mm	97mm	-	-	55kg
CPU50-BH-B	Single Bolt Braked	50mm	69mm	-	-	40kg
CPU75-BH-B	Single Bolt Braked	75mm	97mm	-	-	55kg



Part Number	Fixing Type	Wheel Diameter	Overall Height	Top Plate Size	Hole Centres	Load Rating
TW-CPU50-STP	Top Plate	50mm	77mm	65x65	47x47	55kg
TW-CPU75-STP	Top Plate	75mm	101mm	78x68	56x46	80kg
TW-CPU50-STP-B	Top Plate Braked	50mm	77mm	65x65	47x47	55kg
TW-CPU75-STP-B	Top Plate Braked	75mm	101mm	78x68	56x46	80kg
TW-CPU50-BH	Single Bolt	50mm	69mm	-	-	55kg
TW-CPU75-BH	Single Bolt	75mm	98mm	-	-	80kg
TW-CPU50-BH-B	Single Bolt Braked	50mm	69mm	-	-	55kg
TW-CPU75-BH-B	Single Bolt Braked	75mm	98mm	-	-	80kg

Industrial Castors, Built to Last

Our Industrial range of castors are designed for tough working environments which demand consistent performance and reliability. With a wide selection of wheel types and sizes to choose from, finding the right castor for the job is simple.

Black Rubber Castors

- ⇒ **Ideal for Industrial Applications**
- ⇒ **Zinc Plated for Corrosion Resistance**
- ⇒ **Load Rating up to 180kg per Wheel**
- ⇒ **Suitable for uneven and rough surfaces**



Part Number	Wheel Diameter	Load Rating	Castor Weight	Plate Size	Hole Centres	Overall Height
BR80-STP	80mm	60kg	0.695kg	85x100	60x80	106mm
BR100-STP	100mm	75kg	0.835kg	85x100	60x80	127mm
BR125-STP	125mm	110kg	1.240kg	85x100	60x80	157mm
BR150-STP	150mm	130kg	1.523kg	85x100	60x80	181mm
BR200-STP	200mm	180kg	3.214kg	115x141	80x105	242mm



BR80-STP-B	80mm	60kg	0.852kg	85x100	60x80	106mm
BR100-STP-B	100mm	75kg	0.994kg	85x100	60x80	127mm
BR125-STP-B	125mm	110kg	1.407kg	85x100	60x80	157mm
BR150-STP-B	150mm	130kg	1.685kg	85x100	60x80	181mm
BR200-STP-B	200mm	180kg	3.498kg	115x141	80x105	242mm



BR80-FTP	80mm	60kg	0.395kg	85x100	60x80	106mm
BR100-FTP	100mm	75kg	0.535kg	85x100	60x80	127mm
BR125-FTP	125mm	110kg	0.970kg	85x100	60x80	157mm
BR150-FTP	150mm	130kg	1.235kg	85x100	60x80	181mm
BR200-FTP	200mm	180kg	3.005kg	115x141	80x105	242mm



Part Number	Wheel Diameter	Load Rating	Castor Weight	Hole Size		Overall Height
BR80-BH	80mm	60kg	0.559kg	12mm		106mm
BR100-BH	100mm	75kg	0.736kg	12mm		127mm
BR125-BH	125mm	110kg	1.147kg	12mm		157mm
BR150-BH	150mm	130kg	1.420kg	12mm		181mm



BR80-BH-B	80mm	60kg	0.755kg	12mm		106mm
BR100-BH-B	100mm	75kg	0.895kg	12mm		127mm
BR125-BH-B	125mm	110kg	1.313kg	12mm		157mm
BR150-BH-B	150mm	130kg	1.589kg	12mm		181mm

Polyamide Castors



⇒ Strong, Durable and Lightweight

⇒ Zinc Plated for Corrosion Resistance

⇒ Load Rating up to 230kg per Wheel

⇒ Hard Wearing & Low Roll Resistance



Part Number	Wheel Diameter	Load Rating	Castor Weight	Plate Size	Hole Centres	Overall Height
PA80-STP	80mm	120kg	0.592kg	85x100	60x80	106mm
PA100-STP	100mm	140kg	0.661kg	85x100	60x80	127mm
PA125-STP	125mm	160kg	0.915kg	85x100	60x80	157mm
PA150-STP	150mm	180kg	1.044kg	85x100	60x80	181mm
PA200-STP	200mm	230kg	2.412kg	115x141	80x105	242mm



PA80-STP-B	80mm	120kg	0.647kg	85x100	60x80	106mm
PA100-STP-B	100mm	140kg	0.809kg	85x100	60x80	127mm
PA125-STP-B	125mm	160kg	1.082kg	85x100	60x80	157mm
PA150-STP-B	150mm	180kg	1.231kg	85x100	60x80	181mm
PA200-STP-B	200mm	230kg	2.670kg	115x141	80x105	242mm



PA80-FTP	80mm	120kg	0.285kg	85x100	60x80	106mm
PA100-FTP	100mm	140kg	0.340kg	85x100	60x80	127mm
PA125-FTP	125mm	160kg	0.640kg	85x100	60x80	157mm
PA150-FTP	150mm	180kg	0.780kg	85x100	60x80	181mm
PA200-FTP	200mm	230kg	2.010kg	115x141	80x105	242mm



Part Number	Wheel Diameter	Load Rating	Castor Weight	Hole Size		Overall Height
PA80-BH	80mm	120kg	0.495kg	12mm		106mm
PA100-BH	100mm	140kg	0.558kg	12mm		127mm
PA125-BH	125mm	160kg	0.822kg	12mm		157mm
PA150-BH	150mm	180kg	0.942kg	12mm		181mm



PA80-BH-B	80mm	120kg	0.650kg	12mm		106mm
PA100-BH-B	100mm	140kg	0.710kg	12mm		127mm
PA125-BH-B	125mm	160kg	0.988kg	12mm		157mm
PA150-BH-B	150mm	180kg	1.114kg	12mm		181mm

Non-Marking Rubber Castors

⇒ Ideal for Protecting Delicate Floors

⇒ Zinc Plated for Corrosion Resistance

⇒ Load Rating up to 130kg per Wheel

⇒ Suitable for Uneven and Rough Surfaces



Part Number	Wheel Diameter	Load Rating	Castor Weight	Plate Size	Hole Centres	Overall Height
GR80-STP	80mm	60kg	0.695kg	85x100	60x80	106mm
GR100-STP	100mm	75kg	0.835kg	85x100	60x80	127mm
GR125-STP	125mm	110kg	1.240kg	85x100	60x80	157mm
GR150-STP	150mm	130kg	1.523kg	85x100	60x80	181mm



GR80-STP-B	80mm	60kg	0.852kg	85x100	60x80	106mm
GR100-STP-B	100mm	75kg	0.994kg	85x100	60x80	127mm
GR125-STP-B	125mm	110kg	1.407kg	85x100	60x80	157mm
GR150-STP-B	150mm	130kg	1.685kg	85x100	60x80	181mm



GR80-FTP	80mm	60kg	0.395kg	85x100	60x80	106mm
GR100-FTP	100mm	75kg	0.535kg	85x100	60x80	127mm
GR125-FTP	125mm	110kg	0.970kg	85x100	60x80	157mm
GR150-FTP	150mm	130kg	1.235kg	85x100	60x80	181mm



Part Number	Wheel Diameter	Load Rating	Castor Weight	Hole Size		Overall Height
GR80-BH	80mm	60kg	0.559kg	12mm		106mm
GR100-BH	100mm	75kg	0.736kg	12mm		127mm
GR125-BH	125mm	110kg	1.147kg	12mm		157mm
GR150-BH	150mm	130kg	1.420kg	12mm		181mm



GR80-BH-B	80mm	60kg	0.755kg	12mm		106mm
GR100-BH-B	100mm	75kg	0.895kg	12mm		127mm
GR125-BH-B	125mm	110kg	1.313kg	12mm		157mm
GR150-BH-B	150mm	130kg	1.589kg	12mm		181mm

Polyurethane Castors



- ⇒ **Ultimate Wear, Shock & Impact Resistance**
- ⇒ **Load Rating up to 180kg per Wheel**
- ⇒ **Zinc Plated for Corrosion Resistance**
- ⇒ **Tough, Durable & Non-Marking**



Part Number	Wheel Diameter	Load Rating	Castor Weight	Plate Size	Hole Centres	Overall Height
RPU80-STP	80mm	120kg	0.650kg	85x100	60x80	106mm
RPU100-STP	100mm	140Kg	0.731kg	85x100	60x80	127mm
RPU125-STP	125mm	160kg	1.053kg	85x100	60x80	157mm
RPU150-STP	150mm	180kg	1.243kg	85x100	60x80	181mm



RPU80-STP-B	80mm	120kg	0.804kg	85x100	60x80	106mm
RPU100-STP-B	100mm	140Kg	0.888kg	85x100	60x80	127mm
RPU125-STP-B	125mm	160kg	1.231kg	85x100	60x80	157mm
RPU150-STP-B	150mm	180kg	1.614kg	85x100	60x80	181mm



RPU80-FTP	80mm	120kg	0.337kg	85x100	60x80	106mm
RPU100-FTP	100mm	140Kg	0.411kg	85x100	60x80	127mm
RPU125-FTP	125mm	160kg	0.791kg	85x100	60x80	157mm
RPU150-FTP	150mm	180kg	0.973kg	85x100	60x80	181mm



Part Number	Wheel Diameter	Load Rating	Castor Weight	Hole Size		Overall Height
RPU80-BH	80mm	120kg	0.554kg	12mm		106mm
RPU100-BH	100mm	140Kg	0.629kg	12mm		127mm
RPU125-BH	125mm	160kg	0.961kg	12mm		157mm
RPU150-BH	150mm	180kg	1.140kg	12mm		181mm



RPU80-BH-B	80mm	120kg	0.707kg	12mm		106mm
RPU100-BH-B	100mm	140Kg	0.789kg	12mm		127mm
RPU125-BH-B	125mm	160kg	1.137kg	12mm		157mm
RPU150-BH-B	150mm	180kg	1.346kg	12mm		181mm

Blue Elastic Castors



- ⇒ Roller Bearing for ease of movement
- ⇒ Load Rating up to 160kg per Castor

- ⇒ Zinc Plated for Corrosion Resistance
- ⇒ Shock & Vibration Resistant



Part Number	Wheel Diameter	Load Rating	Castor Weight	Plate Size	Hole Centres	Overall Height
BER100-STP	100mm	140kg	0.803kg	85x100	60x80	127mm
BER125-STP	125mm	160kg	1.105kg	85x100	60x80	157mm



BER100-STP-B	100mm	140kg	0.977kg	85x100	60x80	127mm
BER125-STP-B	125mm	160kg	1.296kg	85x100	60x80	157mm



BER100-FTP	100mm	140kg	0.507kg	85x100	60x80	127mm
BER125-FTP	125mm	160kg	0.852kg	85x100	60x80	157mm



Part Number	Wheel Diameter	Load Rating	Castor Weight	Hole Size		Overall Height
BER100-BH	100mm	140kg	0.722kg	12mm		127mm
BER125-BH	125mm	160kg	1.030kg	12mm		157mm



BER100-BH-B	100mm	140kg	0.880kg	12mm		127mm
BER125-BH-B	125mm	160kg	1.205kg	12mm		157mm

Extra Heavy Duty Castors – up to 750Kg

The Bulldog™ range of Extra Heavy Duty Castors are manufactured from High Grade Polyurethane and Extra Thick metal brackets, ensuring high performance and longevity, even under harsh conditions, are achieved. The Bulldog™ Extra Heavy Duty Castors and Wheels are tested thoroughly to ensure the safe and effective operation and the highest of quality standards. They come complete with Ball Bearing wheels for Smooth mobility.



Part Number	Wheel Diameter	Load Rating	Castor Weight	Plate Size	Hole Centres	Overall Height
ED-NPU125-STP	125mm	400kg	2.433kg	115x140	81x105	170mm
ED-NPU150-STP	150mm	550kg	2.988kg	115x140	81x105	206mm
ED-NPU200-STP	200mm	750kg	3.871kg	115x140	81x105	248mm



ED-NPU125-STP-B	125mm	400kg	2.912kg	115x140	81x105	170mm
ED-NPU150-STP-B	150mm	550kg	3.428kg	115x140	81x105	206mm
ED-NPU200-STP-B	200mm	750kg	4.229kg	115x140	81x105	248mm



ED-NPU125-FTP	125mm	400kg	1.929kg	115x140	81x105	170mm
ED-NPU150-FTP	150mm	550kg	2.231kg	115x140	81x105	206mm
ED-NPU200-FTP	200mm	750kg	3.190kg	115x140	81x105	248mm



ED-APU125-STP	125mm	350kg	2.757kg	115x140	81x105	170mm
ED-APU150-STP	150mm	450kg	3.344kg	115x140	81x105	206mm
ED-APU200-STP	200mm	700kg	4.146kg	115x140	81x105	248mm



ED-APU125-STP-B	125mm	350kg	3.039kg	115x140	81x105	170mm
ED-APU150-STP-B	150mm	450kg	3.623kg	115x140	81x105	206mm
ED-APU200-STP-B	200mm	700kg	4.490kg	115x140	81x105	248mm



ED-APU125-FTP	125mm	350kg	2.237kg	115x140	81x105	170mm
ED-APU150-FTP	150mm	450kg	2.558kg	115x140	81x105	206mm
ED-APU200-FTP	200mm	700kg	3.348kg	115x140	81x105	248mm

Replacement Wheels

Bulldog™ offers an extensive range of wheels. From our Lightweight & Retail range up to our Extra Heavy Duty Range, wheels can be supplied for all products listed within this catalogue. Whether you are looking to use them on their own, or replace your old, worn out wheels, Bulldog™ carries a large stock to supply your immediate demands.



Popular Wheel Materials



Rubber

Rubber wheels offer a smooth and more cushioned motion over rough and uneven surfaces. These wheels are popular for outdoor applications or equipment which is regularly used in different locations.



Polyamide

Polyamide wheels are cost effective and robust. The hard finish makes them suitable for large and heavy loads, whilst keeping the weight of each wheel down. These wheels work best on smooth surfaces.



Thermoplastic

Thermoplastic offer a balance of smoothness and rigidity. These wheels are popular in retail environments as they are quiet but highly resistant to impacts and day to day usage.



Polyurethane

Polyurethane wheels are visually striking and offer a smooth and partially cushioned motion across a variety of surfaces. These wheels are incredibly versatile and are suitable for indoor and outdoor use.

Replacement Wheels

Bulldog™ offers an extensive range of wheels. From our Lightweight & Retail range up to our Extra Heavy Duty Range, wheels can be supplied for all products listed within this catalogue. Whether you are looking to use them on their own, or replace your old, worn out wheels, Bulldog™ carries a large stock to supply your immediate demands.



Part Number	Wheel Diameter	Wheel Width	Load Rating	Bore Diameter	Hub Width	Overall Weight
BR80X25	80mm	25mm	60kg	12mm	33mm	0.180kg
BR100X30	100mm	30mm	75kg	12mm	33mm	0.295kg
BR125X38	125mm	37.5mm	110kg	15mm	43mm	0.545kg
BR150X40	150mm	40mm	130kg	15mm	43mm	0.775kg
BR200X50	200mm	50mm	180kg	20mm	60mm	1.650kg



Part Number	Wheel Diameter	Wheel Width	Load Rating	Bore Diameter	Hub Width	Overall Weight
PA80X30	80mm	30mm	120kg	12mm	33mm	0.075kg
PA100X30	100mm	30mm	140kg	12mm	35mm	0.110kg
PA125X38	125mm	37.5mm	160kg	15mm	44mm	0.220kg
PA150X40	150mm	40mm	180kg	15mm	44mm	0.300kg
PA200X50	200mm	50mm	750kg	20mm	59mm	0.851kg



Part Number	Wheel Diameter	Wheel Width	Load Rating	Bore Diameter	Hub Width	Overall Weight
GR80X25	80mm	25mm	60kg	12mm	33mm	0.180kg
GR100X30	100mm	30mm	75kg	12mm	33mm	0.295kg
GR125X38	125mm	37.5mm	110kg	15mm	43mm	0.545kg
GR150X40	150mm	40mm	130kg	15mm	43mm	0.775kg



Part Number	Wheel Diameter	Wheel Width	Load Rating	Bore Diameter	Hub Width	Overall Weight
RPU80X30	80mm	30mm	110kg	12mm	33.5mm	0.125kg
RPU100X30	100mm	30mm	130kg	12mm	33.5mm	0.189kg
RPU125X38	125mm	37.5mm	150kg	15mm	44mm	0.371kg
RPU150X40	150mm	40mm	170kg	15mm	44mm	0.525kg

Replacement Wheels

Bulldog™ offers an extensive range of wheels. From our Lightweight & Retail range up to our Extra Heavy Duty Range, wheels can be supplied for all products listed within this catalogue. Whether you are looking to use them on their own, or replace your old, worn out wheels, Bulldog™ carries a large stock to supply your immediate demands.



Part Number	Wheel Diameter	Wheel Width	Load Rating	Bore Diameter	Hub Width	Overall Weight
WPA50X20	50mm	20mm	40kg	8mm	22mm	0.020kg
WPA75X25	75mm	25mm	55kg	10mm	27mm	0.060kg
WPA100X25	100mm	25mm	65kg	12mm	27mm	0.090kg



BPP50X20	50mm	20mm	35kg	8mm	22mm	0.018kg
BPP75X25	75mm	25mm	50kg	10mm	27mm	0.045kg



TPR50X20	50mm	20mm	35kg	8mm	22mm	0.026kg
TPR75X25	75mm	25mm	50kg	10mm	27mm	0.064kg
TPR100X32	100mm	32mm	80kg	12mm	35mm	0.140kg



GPVC50X20	50mm	20mm	40kg	8mm	22mm	0.035kg
GPVC75X25	75mm	25mm	55kg	10mm	27mm	0.080kg



PNE-PP260X85	260mm	85mm	120kg	20/25.4mm	75mm	1.070kg
PNE-PP300X100	300mm	100mm	155kg	20/25.4mm	75mm	1.660kg
PNE-PP400X100	400mm	100mm	200kg	25.4mm	75mm	2.260kg

Disclaimer: All information within this catalogue is provided for guidance only. Customers should contact us for further technical information and to ensure products are suitable for their specific application. Bulldog Castors Ltd reserve the right to alter or withdraw product specifications without notice. Bulldog Castors Ltd Standard Terms & Conditions of Sales apply to all orders and services, copy of which can be found on our website. E&OE.

©2016

End Caps, Grommets & Finishing Components



Threaded Inserts



Levelling Feet



Ancillary Components



A selection of the different types of castors are listed below:

- Industrial Castors
- Commercial Castors
- Furniture Castors
- Material Handling Castors
- Transport & Cargo Castors
- Medical Castors
- Shock Absorbing Castors
- Anti-Slip Castors
- High Grip Castors
- Top Plate Castors
- Bolt Holes Castors
- Swivel Castors
- Braked Swivel Castors
- Fixed Castors
- High Temperature Castors
- Rubber Castors
- Polyurethane Castors
- Nylon Castors
- Non-Marking Castors
- Anti-Static Castors
- Plastic Castors
- Stainless Steel Castors

Please contact our qualified technical engineers for free no obligation advice.

Bulldog Castors Ltd.
37 Pine Tree Avenue,
Leicester
LE5 1AL
England

Tel: **+44 (0)116 2970521**
Fax: +44 (0)116 2768934
Email: **sales@bulldogcastors.co.uk**
Web: www.bdcastorsandwheels.co.uk
Web Shop: www.bulldogcastors.co.uk